




SMOOTHWALL

12" SDR 11

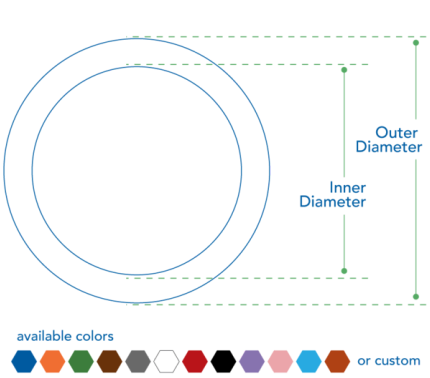

Nominal OD	12.75 in
OD Tolerance +/-	0.064 in
Min. Wall	1.159 in
Wall Tolerance +	0.139 in
Min. ID	10.154 in
Avg ID	10.293 in
Weight	18.319 lb/ft
Bend Radius Sup	230 in
Bend Radius UnSup	344 in
Conduit SWPS	101297 lbs

STANDARD DETAILS

DETAILS	Manufactured from flexible HDPE (High Density Polyethylene)
SPECIFICATIONS	All Smoothwall conduit dimensions meet or exceed one or more of the following: ASTM F-2160, ASTM D-3350, ASTM D-3485, NEMA TC-7, UL 651A, UL 1990, Bellcore GR-356, CSA C22.2 No. 327-18
INSTALLATION TYPES	Plow, Trench, Directional Bore, Direct Burial, Tray Installations, Aerial
COLORS	Blue, Orange, Green, Brown, Grey, White, Red, Black, Lilac, Pink, Aqua, Terra Cotta, Lime Green, or custom colors with optional stripes
CONDUIT MARKINGS	Permanent marking along conduit includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.

OPTIONS

CO-EXTRUDED LINING	SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. With a coefficient of friction 60% lower than standard HDPE conduit without the aid of wet lubricants, SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions. Coefficient of friction for SILICORE ULF 0.07 versus non-lubricated HDPE conduit 0.18-0.22 (internal test method). Available in 1/2" to 6"
PRE-INSTALLED TAPE	Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™ ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable. Available in 1/2" to 6"
PRE-INSTALLED CABLE	Cable can be factory pre-installed in conduit up to 3"
UV PROTECTANT	Available for UV exposure applications (Aerial, Lashed, or External Tray)

REEL SPECIFICATIONS

REEL SIZE	STANDARD LENGTH	REEL TYPE
-	40 ft	Stick

SMOOTHWALL RECOMMENDED ACCESSORIES

12" SDR 11

Safe working pull strength is calculated at 80% of tensile or breaking strength
 Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

HYDRALUBE F200I SUMMER (4) 1 GALLON		HYDRALUBE F300I SUMMER 5 GALLON PAIL		LUBADUK SUMMER (6) 1 GALLON	
<p>Quantity: 30 / Per Pallet</p> <p>Packaging: (4) 1 Gallon</p> <p>Part Number: 20000218</p>		<p>Quantity: 24 / Per Pallet</p> <p>Packaging: 5 Gallon Drum</p> <p>Part Number: 20000005</p>		<p>Quantity: 18 / Per Pallet</p> <p>Packaging: (6) 1 Gallon</p> <p>Part Number: 20000351</p>	

BULL-LINE BUCKET WP25 750FT	
<p>Quantity: 36</p> <p>Packaging: N/A</p> <p>Part Number: 20095171</p>	

Safe working pull strength is calculated at 80% of tensile or breaking strength
 Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.